

Distributed by



by aliaxis

PO Box 360,
Ashburton 7740
P: 0800 288 558
E: customerservice@rxplastics.co.nz
rxp.co.nz

PHI1232-11/22-RXP


OPTI PHIL 1" FLOAT VALVE

INCLUDES 3/4" AND 1-1/4" ADAPTORS

NEW FLOAT VALVE FROM PHILMAC



The connection you can trust.

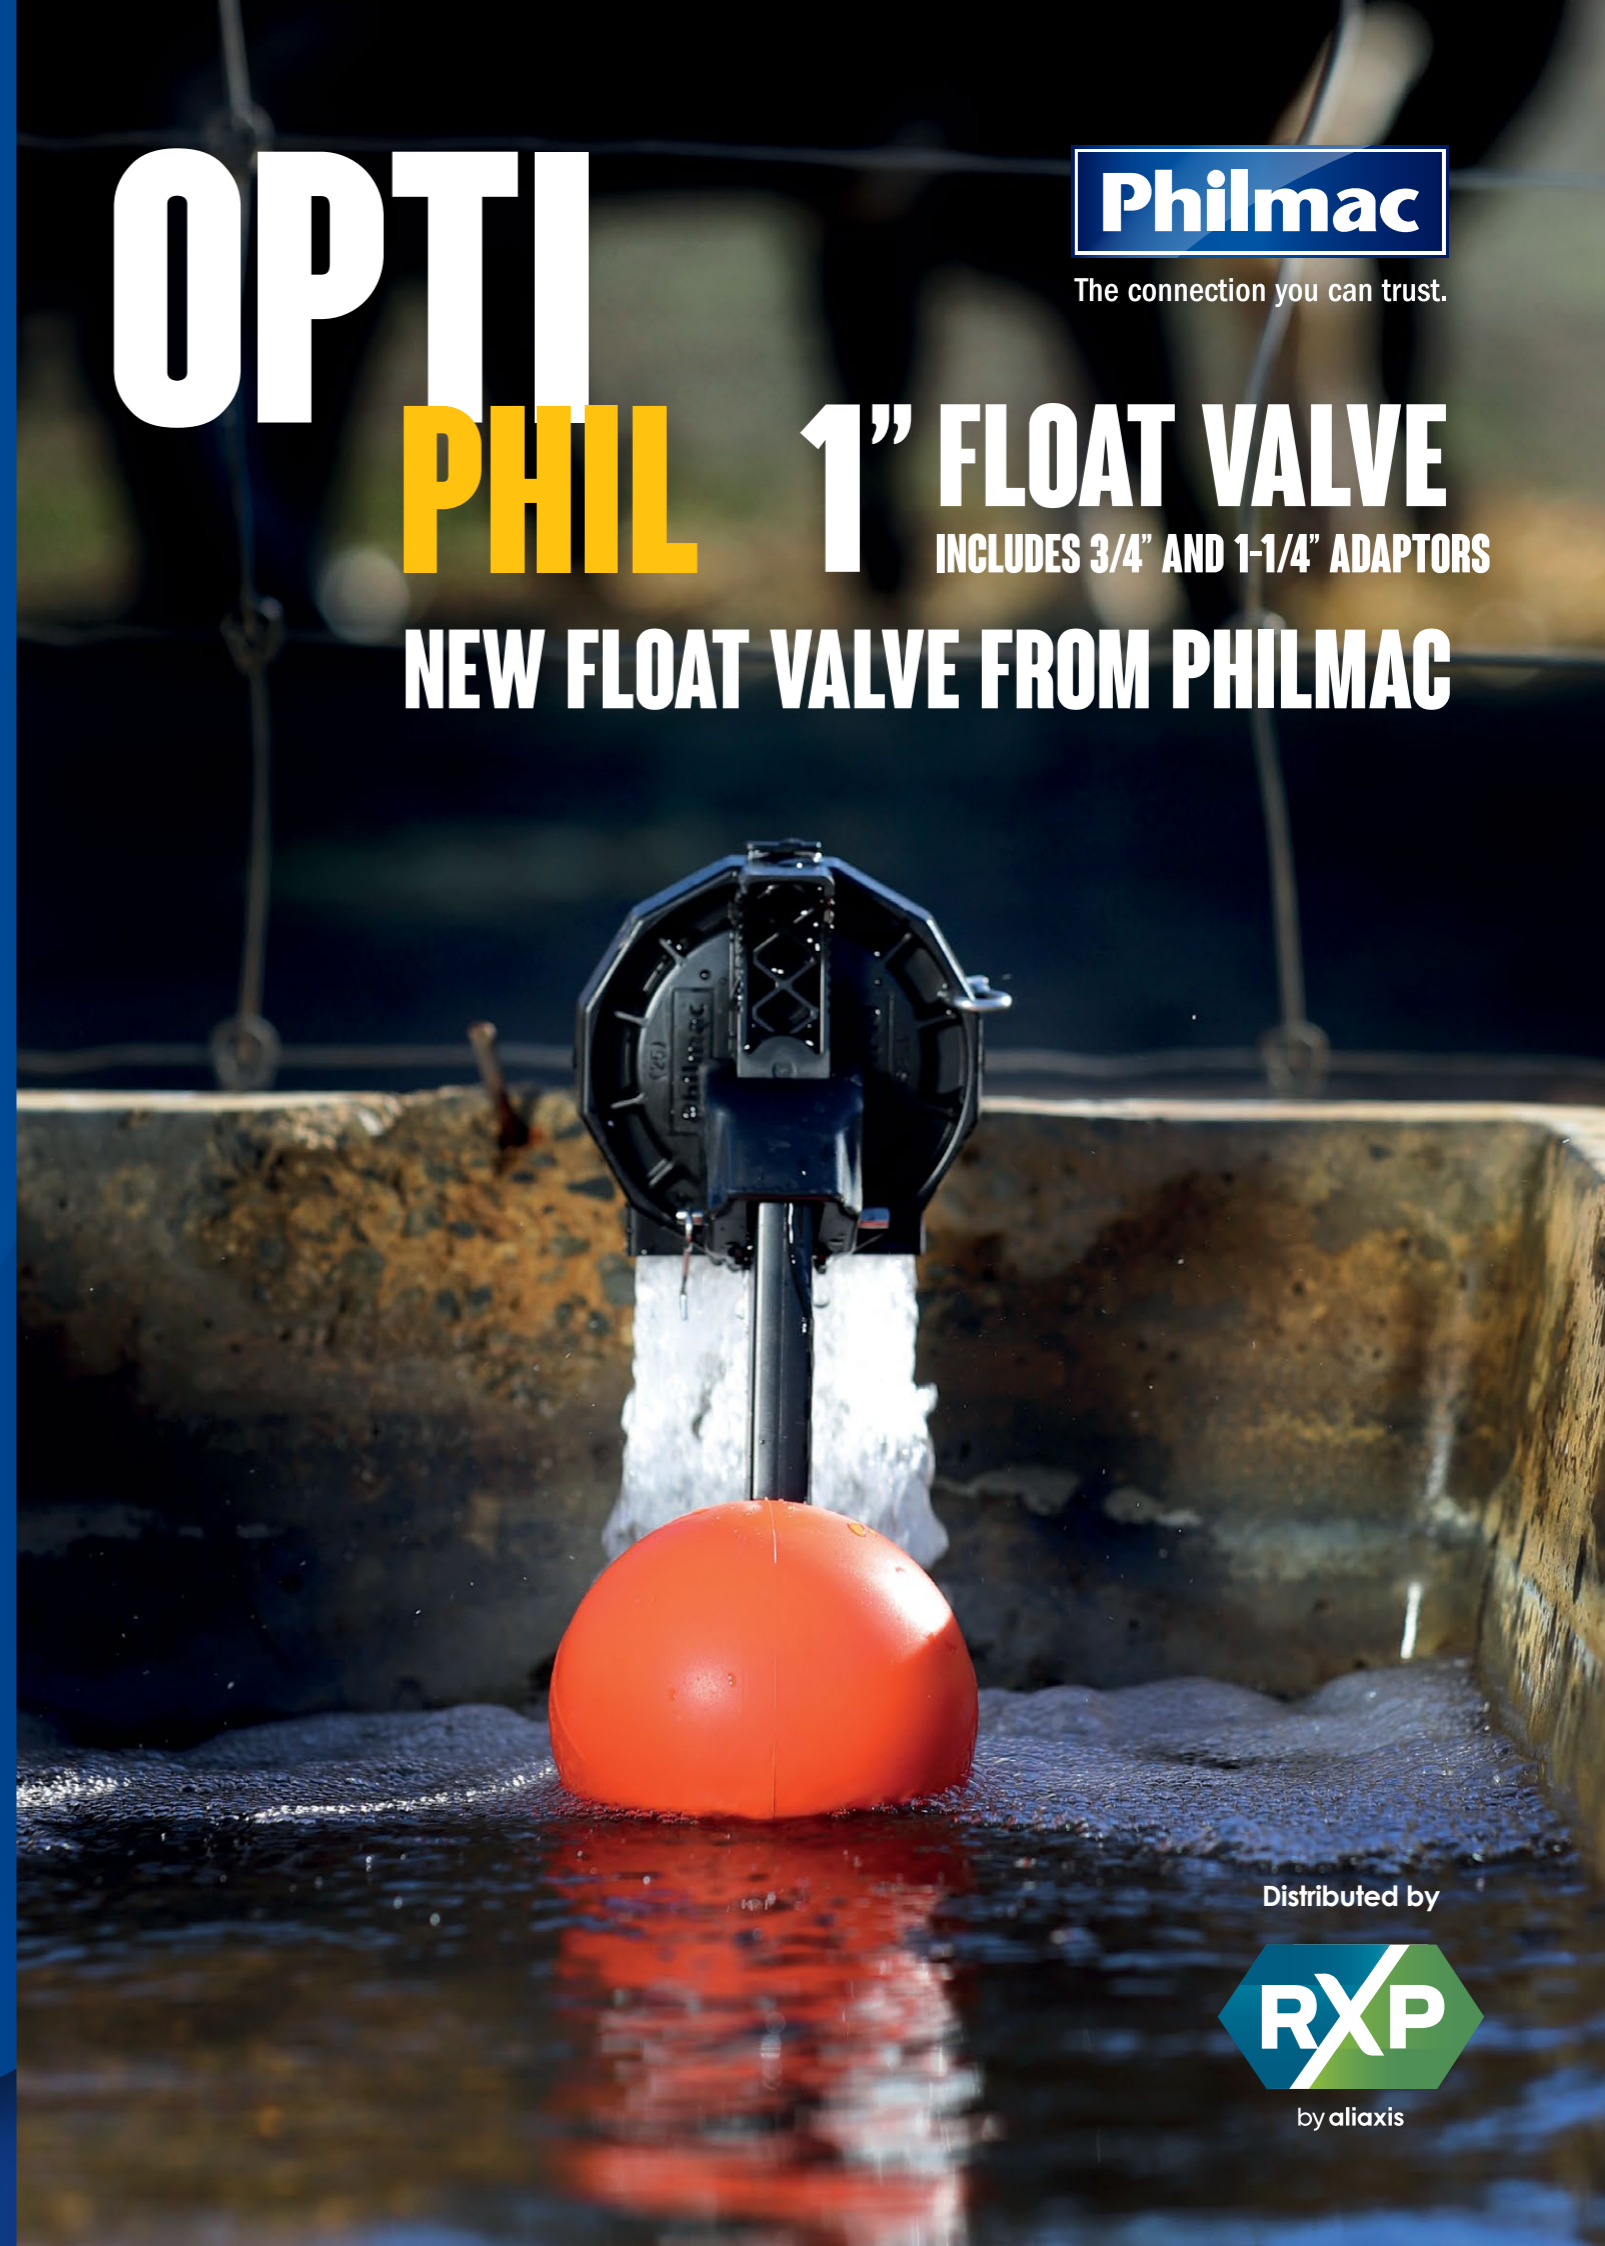

Distributed by



by aliaxis

OPTI PHIL

Tapered BSP
Thread

Max. Flow



847L/min

Shut-off



Pressure

Troughs up to




2500 L Plus

High performance, compact,
float valve for large and medium
troughs with high demand



OptiPHIL Float Valve Performance Data*

**1" TAPERED THREAD
FLOAT VALVE** INCLUDES
3/4" AND 1-1/4" ADAPTORS

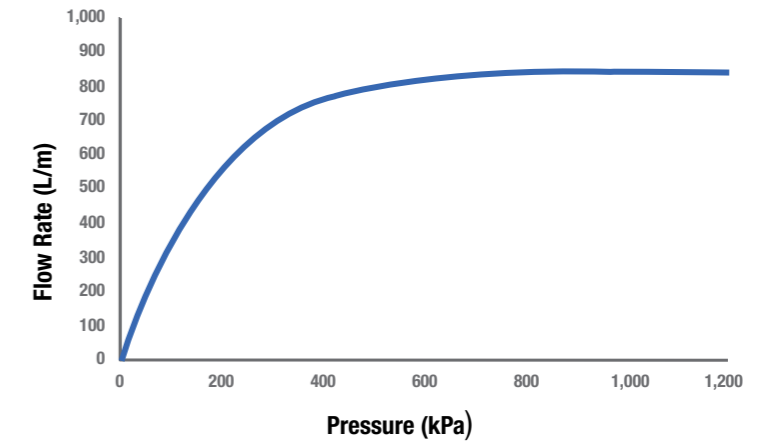

* Independently tested by University of South Australia (AFMG), NATA accredited laboratory

SMOOTH-FLO DESIGN

Optimizes water flow out of the valve, **reducing turbulence, minimizing float bounce**, cutting water spray, and **saving your pump**.

OPTI-FLO TECHNOLOGY

Patent protected, Opti-Flo technology, optimizes water flow through the valve to **help prevent blockages & improve performance in dirty water**.

SOFT-CLOSE

Patent protected, soft closing design for reliable shut-off & **preventing damaging water-hammer**.

FULL FLOW

Full flow design, providing flows up to 847 L/min, and preventing pump short cycling, saving your pump and energy.

HIGH VIS FLOAT

High Vis orange float for fast easy identification of water level from a distance.

Philmac Code	RXP Order Code	Body Material	Inlet Size	Thread Type	Lever Length	Recommended Float Size AS1910	Recommended Float Size Agricultural	Max. Shutoff* (kPa)	Max.Flow* (L/min)
93 6001 00	PH.OPTI.FV25	1" BSP†	1" BSP†	Tapered	n/a	-	4" (100mm)	1,200	847

† Supplied with 3/4" and 1-1/4" Adaptors